

touchONE-manager

On-premises Administration Unit



G Suite

Exchange

Office 365

MAIN FEATURES

- Dedicated unit for on-premises administration and analytics
- Compatible with all touchONE panels and touchONE-overview
- Plug & Play solution
- Built-in web based user interface
- Complete administration of all connected touchONE units
- Analytics and room utilization statistics
- Single cable Ethernet connection
- 802.1X authentication mechanism supported
- Proxy Server support
- Power supply 5 VDC
- Fanless operation
- Small dimension, simple installation


DESCRIPTION

For easy administration of reservation system units, these units are linked to a group called Reservation Suite. Units connected to the same Reservation Suite share their settings, e.g. if you need to change the user account password, you can just do it on one panel and all the other ones within the same reservation suite will adopt the change automatically. During on-premises administration, the entire reservation suite is centrally managed through web interface of the touchONE-manager unit. The touchONE-manager must be plugged into the same LAN as the other units of the Reservation Suite. The touchONE-manager also has other features, such as analytics and room utilization statistics.


Web interface offers the following

- Setup the touchONE-manager unit (IP address, date and time, etc.)
- Create a reservation suite
- Manage a list of servers, user and room accounts
- Manage list of touchONE units connected to the reservation suite
- Manage a company logo
- Manage room support services
- Setting up the touchONE units parameters - language, date and time format, etc.
- Firmware upgrade
- View the analytics of the room usage
- Room statistic data export for usage in software such as Excel
- And many others


WEB INTERFACE - EXAMPLES

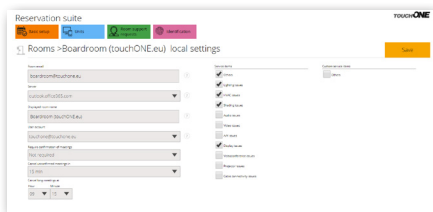

Room settings

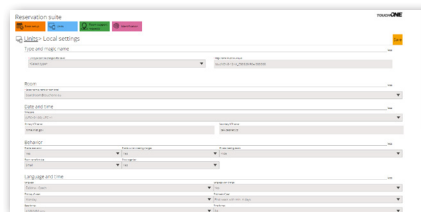


Unit local settings

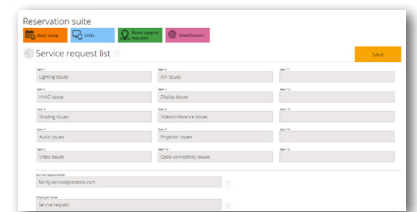

Service requests settings

APPLICATION DIAGRAM

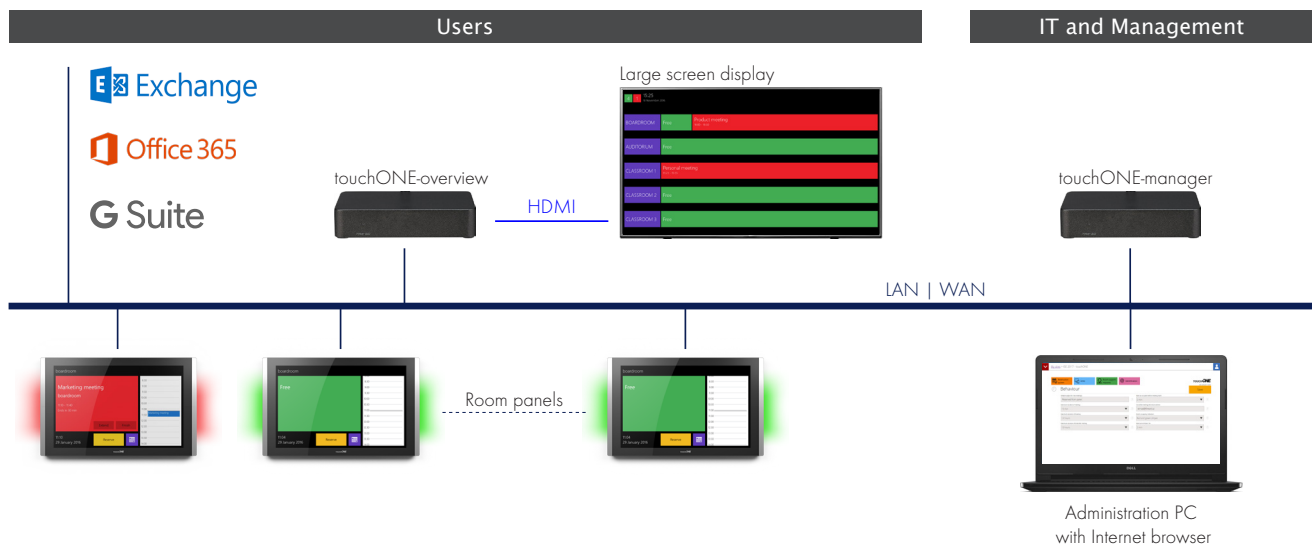

touchONE-manager

On-premises Administration Unit

cue

SPECIFICATIONS

- CPU**
- Rockchip RK3288
 - 28 nm Cortex®-A17 quad core 1.8 GHz
- Memory**
- RAM 2GB
 - Flash 16 GB
- Button**
- Reset
- Indicator**
- Power LED
- Firmware**
- Application for on-premises administration and analytics
 - Complete web user interface for administration and room statistics
- Network**
- 10/100/1000 BaseT LAN, RJ-45 connector
 - 802.1X authentication mechanism supported
 - Proxy Server support
- AV connection**
- HDMI 2.0 output, HDMI connector
 - Displays current IP settings only
- Other connections**
- Not supported by application
- Power supply**
- 5 VDC / 3 A
 - Power jack connector
- Physical**
- Slim metal enclosure
 - Protection IP30
 - Dimensions 118 x 101 x 23.6 mm / 4.6" x 3.9" x 0.9"
 - Weight 0.3 kg / 0.7 lb
- Environment conditions**
- Operating temperature 10° to 40° C, ambient with air flow
 - Storage temperature 0° to 60° C
 - Relative humidity 10% to 90% non-condensing

BOX CONTENTS

- touchONE-manager unit
- Mounting accessories
- Power supply
- Ethernet cable
- Quick Start
- Declaration of Conformity

ORDER INFORMATION

Product code CS0537

The one-time price includes complete unit incl. ready to use administration and analytics application, power supply, mounting accessories, future firmware upgrades, two years standard warranty and product support.

No annual license fee are required.

MECHANICAL DESCRIPTION

